




RMB-1506

6-Channel Custom Installation Amplifier



**AVAILABLE AT
DIGITAL CINEMA**

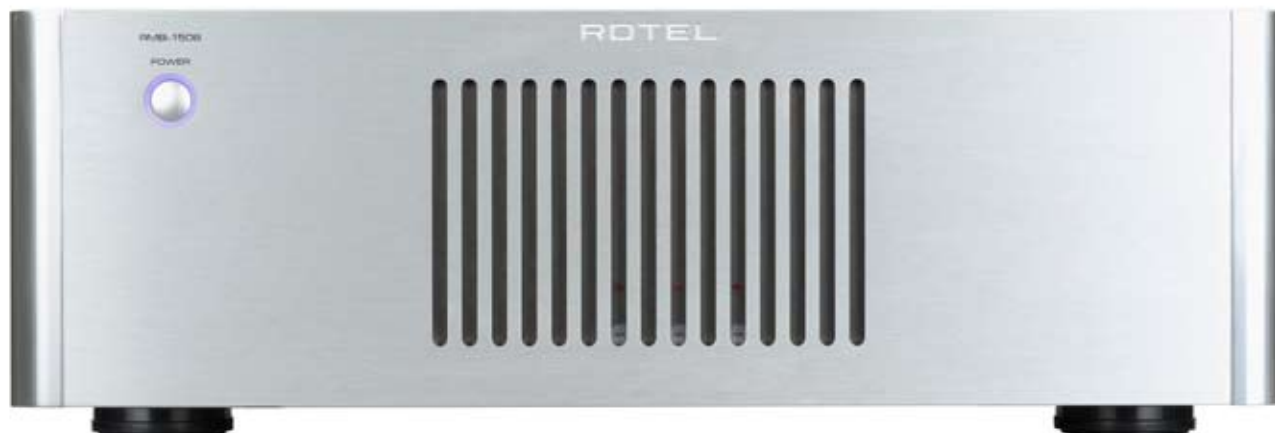

Description

This amplifier is perfect for less elaborate multizone audio systems and can be mated with any of our surround receivers or our preamp/processor to add music throughout three additional living areas or “zones” of your home. You can also add another RMB-1506 for larger multizone applications that don’t need the power output of the RMB-1512. As with all Rotel multichannel amplifiers it includes all of the most wanted custom installation features.

**Note – all Rotel 15 series components may be rack mounted and remotely controlled via RS-232, IR, or 12 volt (depending on model) for complete stealth operation.*

Specifications

Power Output all channels driven	50 watts x 6ch (20 Hz-20kHz, <0.03% THD, 8 ohms) 100 watts x 6ch (20 Hz-20kHz, <0.03% THD, 4 ohms)	Frequency Response (+/-1 dB)	10Hz-100kHz
IM Distortion	< 0.03%	S/N Ratio (IHF A)	115 dB
Damping Factor (8 ohms)	>200	Power Consumption	450 watts
Gain		Dimensions (W x H x D) mm	431 x 144 x 424 mm (17 x 5 5/8 x 16 5/8 in)
Input Sens. / Impedance	1.0 V / 20 k Ohms	Weight	15.3 kg (33.7 lbs)

www.rotel.com

The Rotel Co. Ltd.
10-10 Shinsen-Cho
Shibuya-Ku,
Tokyo 150, Japan

Rotel of America
54 Concord St.
N. Reading, MA 01864
USA
T +1 978 664 3820
F +1 978 664 4109

Rotel Europe
Dale Road
Worthing
West Sussex BN11 2BH, UK
T +44 (0) 1903 221 763
F +44 (0) 1903 221 525