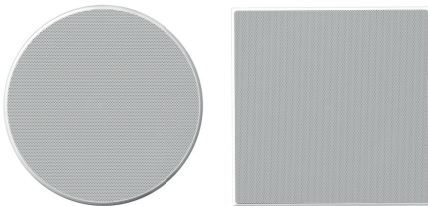# Bowers & Wilkins

DIGITAL CINEMA

AVAILABLE AT DIGITAL CINEMA

See nothing, hear everything

This speaker is designed for down-firing, in-ceiling left, center and right speaker positions in a discreet home cinema system. Both drivers are angled to the mounting surface and can be directed towards listeners so they hear the correct balance of sound. That way, dialogue is crystal clear and special effects come across accurately.

Thanks to Bowers & Wilkins unique QuickDogs™ fixing method, installation is simple, requiring no tools. And, in common with other recent CI products, it features an ultra-narrow bezel and magnetically attached metal grille, both of which can be customised to complement décor.

If preferred, the supplied round grille can be replaced with an optional, square CCM683 grille.

Technical Specifications

Description	2-way in-ceiling system
Drive Units	1x Ø25mm (1 in) Nautilus™ swirl loaded aluminium dome tweeter 1x Ø180mm (7 in) blue Kevlar® cone bass/midrange
Frequency range (-6dB)	45Hz – 50kHz
Recommended Amplifier Power	25W – 150W
Sensitivity	88dB (2.83V, 1m)
Nominal Impedance	8Ω (4.5Ω minimum)
Frame diameter	290mm (11.4 in)
Cut-out diameter	249mm (9.8 in)
Depth behind surface (.5 in minimum wall)	114.3mm (4.5 in)
Pre-mount Kit	PMK C8
Back Box	BB 6C
Square Grille Option	GR68SQ
Packed	1 per carton

Bowers & Wilkins

www.bowers-wilkins.com

CEDIA

This information is intended as a guide only and reflects the current specification at the time of print. We reserve the right to make changes to the specifications.