# SHORT THROW POCKET LED PROJECTOR **ML750ST**



## PALM-SIZED LED SHORT THROW PROJECTOR







CONNECTIVITY (May require optional accessories)

Engineered for mobile communicators or power users on the go, the ML750ST's powerful short throw lens delivers presentations, pictures, and videos in environments with limited space for projection. Experience ultra-bright images, crystal clear text, and sharp vibrant videos from a palm sized projector with the power and performance of a full sized projector. The ML750ST delivers a big picture in small spaces anywhere, anytime.

With an impressive 700 ANSI lumens, 20,000:1 contrast ratio, auto keystone, and Rec709 color gamut, the ML750ST delivers vibrant razor sharp WXGA images when viewing presentations and spreadsheets in the office or meetings in the field. The intergrated Media Player can be utilized to playback movies, view images, or power digital signage.

Designed for traveling professionals and power-users, the palm-sized ML750ST weighs less than one pound and features an integrated HDCast Pro for Device Mirroring and Multimedia Playback. This feature allows mirroring of Android, iOS, and Windows devices, presentation viewing,

and multimedia playback of music, pictures, and videos. The state of the art LED light source is rated to last over 20,000 hours, greatly reducing the need to replace the LED light source.



FITS IN YOUR PALM



















microSD USB

COMPUTERS

SMART PHONES TABLETS

SET TOP BOXES

DIGITAL CAMERAS

## SHORT THROW POCKET LED PROJECTOR - ML750ST

#### **OPTICAL/TECHNICAL SPECIFICATIONS**

JIFICATIONS
Single 0.45″ DMD DLP <sup>®</sup> Technology by Texas Instruments <sup>™</sup>
WXGA (1280 x 800)
WXGA (1280 x 800)
700 Lumens
20,000:1 (full on/full off)
16.7 Million
20,000 (LED Life) (hrs)
±40° Vertical (Auto Keystone)
88%
100%
16:10 Native, 16:9 and 4:3 compatible
0.8:1
16" - 135"
25" - 200" Diagonal 16:10
F/1.9; f=8.02mm, Fixed
1.5W Speaker
22dB
Full Function Mini Remote Control
5 - 40°C, 80% Humidity (Max), 2500m Altitude (Max)
100-240V, 50-60 Hz
77W Bright mode (< 0.5W Standby)
1.5GB Onboard memory, microSD slot supports up to 64GB
Support USB Thumb Drives only; will not support external USB hard drives
Operating Temp @ Sea Level to 10000 feet = 23C (max); must manually switch to high altitude mode @ 5000 feet & above (using OSD)
LED

### COMPATIBILITY SPECIFICATIONS

Computer Compatibility	WSXGA+, SXGA+, WXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Input Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
3D Compatibility*	3D Ready -The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems.
Vertical Scan Rate	24 - 120Hz (120Hz for 3D)
Horizontal Scan Rate	49.64 kHz
Latency	17ms
User Controls	12 Languages: English, French, Spanish, Portuguese (Brazilian), German, Russian, Italian, Polish, Dutch, Swedish, Greek, Turkish
VO Connection Ports	HDMI + MHL v2.0, Universal I/O - VGA, microSD- slot, USB-A reader with support for USB Wireless dongle, Audio out
Loop Through (Audio)	Yes


#### PHYSICAL SPECIFICATIONS

Security	Kensington <sup>®</sup> Lock
Weight	Projector: 12.8 oz. Power adaptor: 4.8 oz.
Dimensions (W x H x D)	4.4" x 1.6" x 4.1" (112.5 x 40.5 x 105 mm)

#### INTEGRATED HDCAST PRO TECHNICAL AND FUNCTIONALITY

ML750ST includes an integrated HDCast Pro Device Mirroring and Multimedia Playback Device. WUSB wireless dongle is required to use HDCast Pro. WUSB is optional and can be purchased separately. For HDCast Pro Technical Specifications (codecs, containers, etc), please download the HDCast Pro datasheet from http://www.optomausa.com.

\*3D content can be viewed with DLP Link active shutter glasses when the projector is receiving a compatible 3D signal from a compatible source device. Please visit www.OptomaUSA.com for more information.

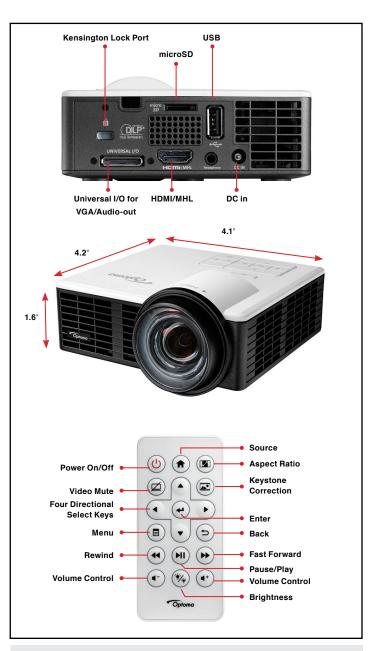

#### Warranty

1 Year Optoma Parts and Labor

#### In the Box (Standard Accessories)

ML750ST projector, Carry bag, AC power cord, universal I/O cable, remote control, battery for the remote, quick start card

#### **Optional Accessories**

ZD302 DLP Link 3D glasses, WUSB 802.1-N WiFi Dongle

#### Accessory Part Numbers

Remote: BR-ML75N	Universal to VGA/audio cable:
AC power adapter: BC-ML55PDX	BC-PK5AVGX
AC power cord: BC-PUPNXY02	Mini tripod: BM-1021N
Wireless USB Adapter: SP.71Z01GC01	Carry Bag: BK-ML70S

UPC 796435 41 995 0

## www.OptomaUSA.com



Copyright © 2016 Optoma Technology, Inc. DLP<sup>®</sup> and the DLP logo are registered trademarks of Texas Instruments<sup>™</sup>. All other trademarks are the property of their respective owners. All specifications subject to change at any time.