

marantz®



**AVAILABLE AT
DIGITAL CINEMA**

M-CR612 TRUE HIFI NETWORK SYSTEM





The Marantz M-CR612 is the personification of pure, refined musicality. The elegant network CD receiver supports near limitless streaming platforms through AirPlay 2, Bluetooth and HEOS Wi-Fi connectivity. Connect your speakers to the M-CR612 through four high-efficiency digital audio amplifier channels and enjoy the most musical Marantz audio. With two optical digital inputs, you can even connect your television for elevated entertainment experience. The built-in DAB+ and FM tuners as well as TuneIn Internet Radio complete the set of music sources. If music matters to you, the M-CR612 is the pinnacle system for your entertainment.

Highlights

Your Benefits


60W x 2ch (6 ohms), or 4x 30W for speaker A/B with individual volume setting	Power and connectivity to suit your demanding audio preference
Plays CD, WMA/MP3 (CD-R/RW) and features an FM and DAB+ tuner	No matter how you listen, enjoy your music with elevated Marantz audio quality
Play songs from Internet Radio, Spotify, Amazon Prime Music, TIDAL, and from your smartphone via AirPlay 2 or Bluetooth app	Stream music from all your favourite sources
Supports Amazon Alexa, Google Assistant and Apple Siri voice agents	Use your voice to control the M-CR612, no matter which voice agent
Supports MP3 and gapless WAV/FLAC/ALAC 192kHz/24bit, DSD 2.8/5.6MHz playback	High-performance, high-resolution audio playback for every source
Built-in Bluetooth and Wi-Fi with 2.4GHz/5GHz dual band support	Improved network stability even in Wi-Fi-crowded homes
Includes two digital Optical inputs with auto-sensing for your TV or digital device	The M-CR612 detects the signal input from your TV and outputs elevated audio
Works with your existing TV remote	Program the M-CR612 to work with your TV remote and easily adjust volume up, volume down, mute and source selection



because music matters

M-CR612

TRUE HI-FI NETWORK SYSTEM

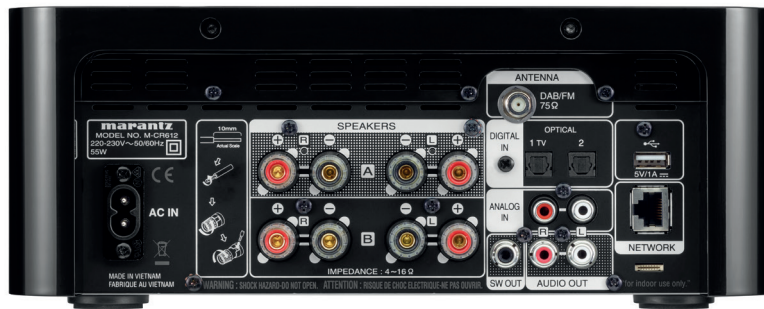

FEATURES	M-CR612
High quality power output	2x 60 W or 4x 30 W
Bi-Amping / Parallel BTL mode	• / •
CD Compatibility: CD / CD-R/RW / WMA / MP3 / AAC	• / • / • / • / •
Tuner: DAB / DAB+ / FM (RDS)	• / • / •
WiFi / Bluetooth / Spotify Connect / AirPlay 2	• / • / • / •
Network & Online Music Streaming	•
HEOS Multiroom integrated	•
Rear USB	•
Speaker A / B	• (Individual volume)
Powered multi-room for one extra room	•
Digital Optical in / Analogue in	2 / 1
Analogue out	Fixed & Variable
Subwoofer Pre-out	•
Headphone Output	•
High Grade Audio Components	•
Tone Control: Bass / Treble / Balance	• / • / •
Low Noise OLED display	3 line
Illuminated front	pure white + off mode
Clock / Sleep Timer	• / •
Programmable Timer: Once / Daily	• / •
NETWORK MUSIC STREAMING	
Ethernet / Wi-Fi	• / • (dual antenna / dual band)
Made for iPhone/iPod/iPad	with AirPlay 2
Internet Radio (TuneIn)	•
Spotify Connect, Deezer, TIDAL, Napster, Soundcloud *	• / • / • / - / •
Lossy formats MP3 / WMA / AAC	• / • / •
Lossless formats FLAC / ALAC / WAV	• / • / •
DSD Streaming	• (2.8 MHz / 5.6 MHz)
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
Gapless playback	• (FLAC, WAV, ALAC, DSD)
Compatible with Remote App for Smart Phones	• (Android/iOS)

SPECIFICATIONS			
AUDIO SECTION			
Power Output (6 ohm, 1kHz)		60 W / 30 W	
Number of channels		2 / 4	
Freq. Response (Analogue In)		5Hz - 40kHz	
Signal to Noise Ratio		90dB	
Total Harmonic Distortion		0.1 %	
DAB+ SECTION			
Receiving Range (Band III)		•	
Signal to Noise Ratio DAB (Mono/Stereo)		95dB	
Frequency response DAB		20Hz - 20 kHz	
Stereo Separation DAB		90dB	
TUNER SECTION FM			
Frequency Range FM		87.5 - 108 MHz	
Signal to Noise Ratio (Mono/Stereo) FM		70/70dB	
Total Harmonic Distortion (Mono/Stereo) FM		0.3/0.4%	
GENERAL			
Available colors		Black / Silver-Gold	
Power Consumption		55 W	
Standby Consumption		0.3 W	
Auto Power off		•	
Detachable Power Cable		•	
Remote Control		RC014CR	
DAB Antenna included		•	
Maximum Dimensions (W x D x H)		280 x 303 x 111 mm	
Weight		3.4 kg	
EAN			
EU	MCR612/N1B	4951035068014	Black
	MCR612/N1SG	4951035067994	Silver-Gold
UK	MCR612/T1B	4951095071085	Black
	MCR612/T1SG	4951095071092	Silver-Gold

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.