

marantz®



NR1509 ULTRA-SLIM 5.2 CHANNEL AV RECEIVER WITH ONLINE MUSIC STREAMING




With a slim profile that never sacrifices performance for looks, the Marantz NR1509 AVR delivers 5.2 channels and high-resolution surround sound from Dolby TrueHD and DTS-HD Master Audio. With 6 HDMI inputs — including one on the front panel — the NR1509 is fully compatible with the latest 4K Ultra HD video specifications, including 60Hz full rate content, 4:4:4 Pure Color sub-sampling, BT.2020, HDR and Dolby Vision. The NR1509 features a power amplifier section with high-current discrete transistors to best support high-resolution audio. Enjoy your favourite music services via Bluetooth, Apple AirPlay or the HEOS app. Control NR1509 with your voice and Amazon Alexa — download the HEOS Home Entertainment skill and ask Alexa to play, pause or stop music, switch inputs for your different media players, turn up the volume and more.

Highlights

Your Benefits

| | |
|--|---|
| Slim Design 5.2 channel AV Receiver with 85W per channel | Enough power to fill your living room with renowned Marantz sound |
| Dolby True HD and DTS-HD decoding | High resolution sound formats for stunning effects |
| AirPlay, Bluetooth, Internet Radio, Spotify Connect, Network Audio Streaming | Access to almost unlimited online music sources |
| Works with Amazon Alexa via the HEOS Home Entertainment skill | Enjoy hands-free control with Amazon Alexa and your voice (differs per country) |
| Built-in WiFi with 2.4GHz/5GHz dual band support; built-in Bluetooth | Improved network stability especially in WiFi-crowded homes |
| 4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR and BT.2020, plus Dolby Vision compatibility and Hybrid Log Gamma | Latest HDMI standard for future-proof compatibility |
| 6 HDMI inputs (incl. 1 front) with full HDCP 2.2 support | Plenty of inputs for your Blu-ray Player, game console and more |
| DSD (2.8/5.6MHz), FLAC, ALAC and WAV support | High Resolution audio streaming, even gapless |
| Audyssey MultEQ, Dynamic Volume and Dynamic EQ | Delivering perfect equalization for your individual room |
| Integrated Phono input to directly connect your turntable | Enjoy the pure intent of each recording within your vinyl collection |
| Colour-coded speaker terminals, Setup Assistant, Marantz AVR Remote App | Hassle-free installation, setup and operation |
| Intelligent ECO mode with off/on/auto setting | Energy-conscious without compromising on performance |




because music matters

NR1509

ULTRA-SLIM 5.2 CHANNEL AV RECEIVER

WITH ONLINE MUSIC STREAMING

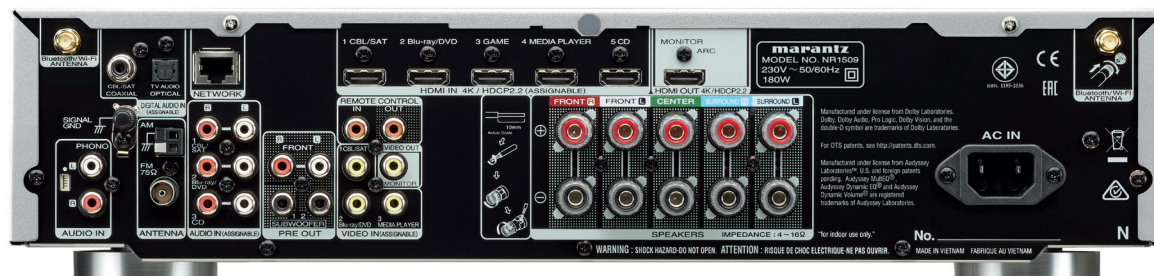

| FEATURES | NR1509 |
|---|----------------------------------|
| MULTICHANNEL SURROUND | |
| DTS HD Master / DTS:X / DTS NEO:6 | • / - / • |
| Dolby TrueHD / Dolby Atmos / Dolby ProLogic II | • / - / • |
| Multichannel Stereo | • |
| Compressed audio Enhancer: MDAX2 | • |
| Audyssey | MultEQ |
| Audyssey Dynamic EQ / Dynamic Volume | • / • |
| NETWORK / SOURCES | |
| Network Audio Streaming | • |
| HEOS Multiroom integrated | • |
| Voice Control | Works with Amazon Alexa* |
| Lossy formats MP3 / WMA / AAC | • / • / • |
| Lossless formats FLAC / ALAC / WAV | • / • / • |
| DSD Streaming | • (2.8 MHz / 5.6 MHz) |
| FLAC HD 192/24 / WAV 192/24 / ALAC 192/24 | • / • / • |
| Gapless playback | • (FLAC, WAV, ALAC, DSD) |
| AirPlay audio streaming | • |
| Internet Radio (TuneIn) | • |
| Spotify Connect, Deezer, TIDAL, Napster, Soundcloud * | • / • / • / • / • |
| Compatible with Remote APP for Smart Phones | Android/iOS |
| Ethernet / Wi-Fi | • / • (dual antenna / dual band) |
| Network: (IP-control / update) | • / • |
| Front Inputs: HDMI / USB | • / • |
| USB Audio | • |
| FM / AM Tuner | • / • |
| Bluetooth | • |
| HDMI | |
| 4K 60Hz 4:4:4 resolution / HDCP 2.2 | • / • |
| Dolby Vision compatible / Hybrid Log Gamma (HLG) | • / • |
| HDMI pass through on stand-by | • |
| 3D video pass through | • |

* This feature is not available in all countries.

| | |
|---|--------------------|
| INPUTS/OUTPUTS | |
| VIDEO | |
| Composite In / Out | 3 / 1 |
| Component In / Out | 2 / 1 |
| HDMI In / Out | 5+1 / 1 |
| AUDIO | |
| Analogue In / Out | 3 / 0 |
| Phono In | 1 |
| Digital Optical In | 1 |
| Digital Coaxial In | 1 |
| Multichannel Pre Out | • (2.2) |
| Zone audio preout | - |
| Subwoofer Out | 2 |
| SPECIFICATIONS | |
| Number of poweramps | 5 |
| Power Output per channel | |
| 6 ohm, 1 kHz, 1%, 1ch Drive | 85 W |
| 6 ohm, 1 kHz, 0.7%, 2ch Drive | 60 W |
| 8 ohm, 20 Hz - 20 kHz, 0.08%, 2ch Drive | 50 W |
| Audio Signal to Noise Ratio | 98 dB |
| GENERAL | |
| Available colours: Black / Silver-Gold | • / - |
| System Remote Control | RC040SR |
| Power Consumption in W | 250 |
| Power Consumption No-Sound (ECO ...on/off) in W | 25 / 35 |
| Standby Consumption in W | 0.2 (with CEC 0.5) |
| Maximum Dimensions (W x D x H) in mm | 440 x 376 x 105 |
| Weight in kg | 8.2 |

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.