


# PI-W6 Wall Speaker



The PI-W6 is a more traditional rectangular wall-mount speaker, ideal for Home Cinema or multi-room stereo installations. Once again, featuring the pivoting tweeter pod and having adjustable sensitivity for each of the drive units within 3dB of level, this model also features clamp bars for easy installation in cavity or solid masonry walls.

It's diminutive size belies the significant power capable of being produced - enough to deliver the most challenging score or soundtrack with breathtaking ability.

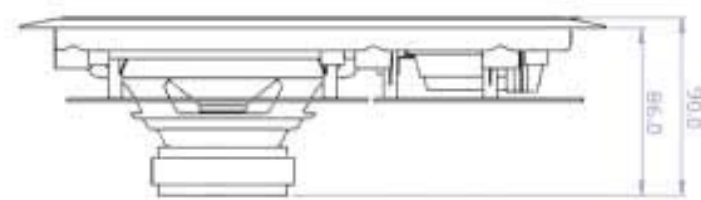

PI-W6	
Transducer Complement	2 Way
Cone Bass driver	6.5" / 170mm KEVLAR
Soft Dome Tweeter	1" / 25mm Textile dome
Nominal Impedance	4/6/8 $\Omega$
Frequency response +/- 6dB	50Hz-20kHz
SPL 1W @ 1m	90dB
Recommended Amplifier Power	5-80W
<b>Product Dimensions</b>	
Height	12.25" / 312mm
Width / Diameter	8.81" / 223mm
Depth	3.54" / 90mm
Cutout size	305 x 200mm
<b>Tone Controls</b>	
High Frequency	+/- 3dB (on front switches)
Bass	+/- 3dB (on rear tags)
Securing	Clamp bars
Finishes	Raddison White, Aluminium grille with dust gauze, pre-painted, 'Raddison' white frames. Cutout template and paint / spray mask included

This model is supplied in pairs

PI-W6 wall speaker

